



SPARTAN TOOL

HOSE REEL PUSH BUTTON *for Urban Warrior Installation Instructions*




DISCLAIMER

Please read all instructions carefully before proceeding with installation.

HOSE REEL PUSH BUTTON INSTALLATION


1. **Remove Existing Push Button Assembly.** Use a plastic pry tool to carefully remove the push button assembly from the hose reel swing arm. Once removed, slide the contact block off the push button.

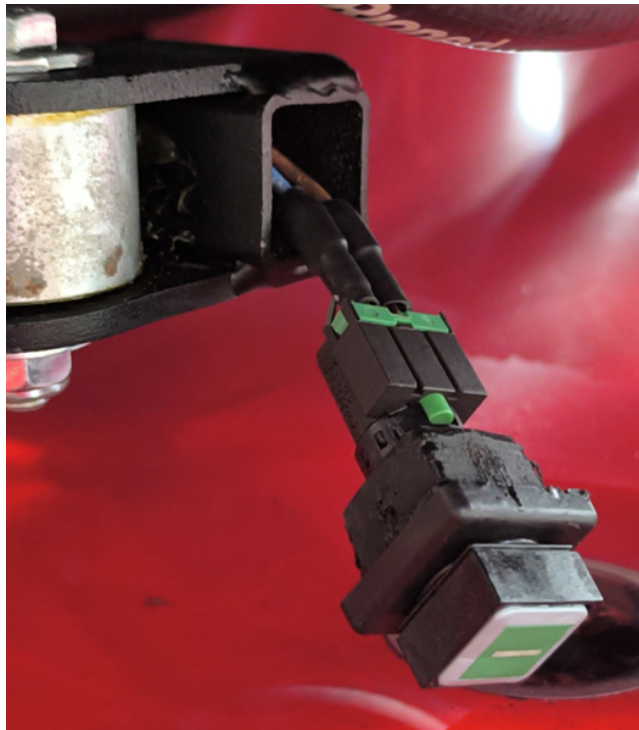

2. **Disassemble the Push Button.** Disconnect the contact block from any wiring and set it aside. Twist the push button counterclockwise to release it from the plastic housing, then remove it completely.




3. **Replace Lock Ring and Install New Push Button.** Remove the threaded lock ring from inside the housing. Install the lock ring supplied with the push button. Thread the new push button into the housing until snug. Do not overtighten.

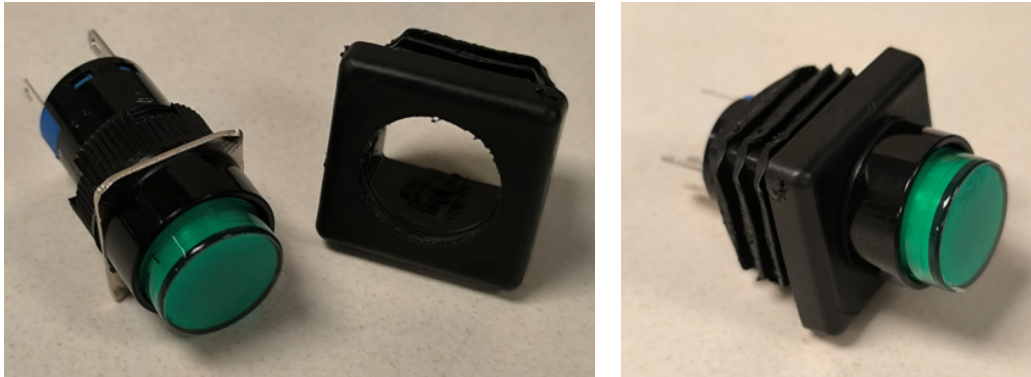


4. **Connect Wiring.** Attach the blue wire to the Common (C) terminal and the brown wire to the Normally Open (NO) terminal of the new push button. Any other blade terminals or exposed wire should be insulated with electrical tape to prevent a short-circuit. Ensure that all connections are secure and properly seated.

SPDT SWITCH DIAGRAM

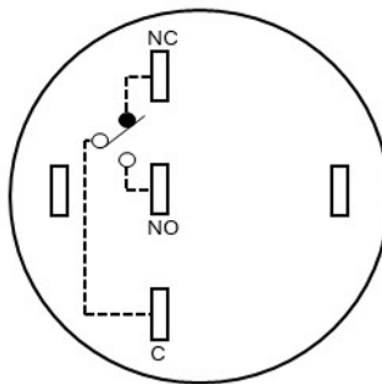

- 5. Install New Push Button Assembly.** Carefully install the new push button assembly into the metal tube of the hose reel swing arm, ensuring a snug fit.

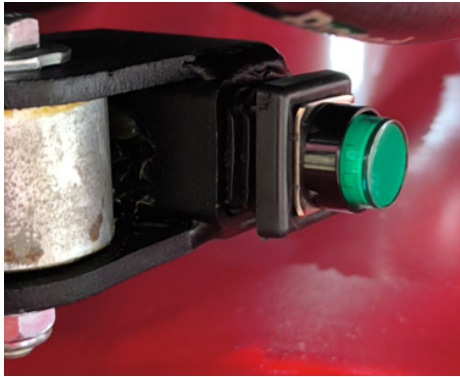

Tip: Before installing the new push button, verify operation with a multimeter in continuity mode. Place the leads on the (C) and (NO) terminals. Continuity should be present when the button is pressed and absent when released.